



0800 / 12 24 100\*

\*Toll-free calls throughout Germany




COMPETENT. FAST. RELIABLE


## ACR-KS-25 – Technical Specifications – Rental Close Control Air-Conditioning Unit



### Quick overview



### Optionally accessories

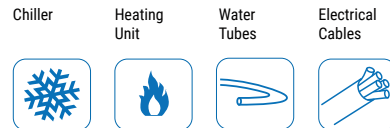

Different requirements and applications can be provided on request!

### Technical specifications:

Cooling capacity	kW	25
Max. air flow volume	m <sup>3</sup> / h	9000
Cold water temperatures	°C	6/ 12
Air inlet	°C / r.F.	26°C / 55% r.F.
Air outlet	°C	18°C
Filter class	-	G4
External static pressure	Pa	200
* Voltage / Electrical Connection	V/Hz/Ph	400/50/3 (CEE 16A)
Operating current	A	6
Sound pressure at 5m	db (A)	52
Dimensions (l x w x h)	mm	1310 x 780 x 1980
Weight	kg	370

\* On-Site power installation should be entrusted to an electrical specialist.

### Technical description:

Close control A/C unit for installation to the external cold water network or acr cold water producer. Air conditioning cabinets pre-painted galvanized sheet metal with stainless steel screws. Interior lining material is heat resistant and soundproof. Centrifugal blower with direct drive, both sided intake, statically and dynamically balanced. Air filters are made of filter class EU4 recyclable synthetic material. The electrical control cabinet with its user-friendly control unit is integrated in the air conditioning cabinet. Extensive optional accessories are available, such as straight and three way valves, supply air plenum, high capacity fan motors, humidifiers and more.