



0800 / 12 24 100\*

\*Toll-free calls throughout Germany




COMPETENT. FAST. RELIABLE


# ACR-M-290-W/WP – Technical Specifications – Rental Chiller with Reversible Heat Pump Function



## Quick overview

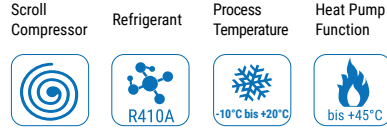

## Optionally accessories

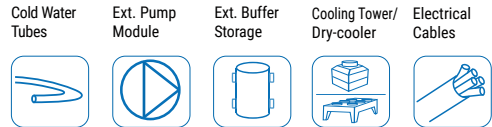

Different requirements and applications can be provided on request!

## Technical specifications:

*Cooling capacity	kW	291
**Heating capacity	kW	388
Power input	kW	74
Voltage	V/Hz/Ph	400/50/3
Operating current	A	183
Electrical connection	Cable terminals	3 Ph + PE
*** Fuse protection	A	200
*** Cable recommendation	mm <sup>2</sup>	4 x 95
Flow rate Evaporator	m <sup>3</sup> /h	50,0
Flow rate Condenser	m <sup>3</sup> /h	62,6
Max. operating pressure	bar	10
Cold water connections	Storz	B
Condenser water connections	Storz	B
Capacity control	Steps	3
Refrigerant	-	R410A
Sound pressure at 5m	dB(A)	68
Transport weight	kg	1200
Dimensions (l x w x h)	mm	2432 x 928 x 1186

\* Design conditions: Evaporator water temperatures 12/7°  
Condenser water temperatures 29/35°C

\*\* Design Conditions: Hot water temperatures 40°/45°,  
Evaporator water temperatures 15°/10°

\*\*\* On-Site power installation should be entrusted to an electrical specialist.

## Technical description:

The water-cooled liquid chillers with reversible operation can be used for cooling/heating. The unit are equipped with two quiet running scroll compressors. The plate evaporator and the plate condenser consist of stainless steel. The unit should be set up on a horizontal, stable work area inside and have at least 1.5 m free space to all sides. All controls and regulators are contained within the housing.